


## CCU28-HD F

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your CCU28-HD F today!

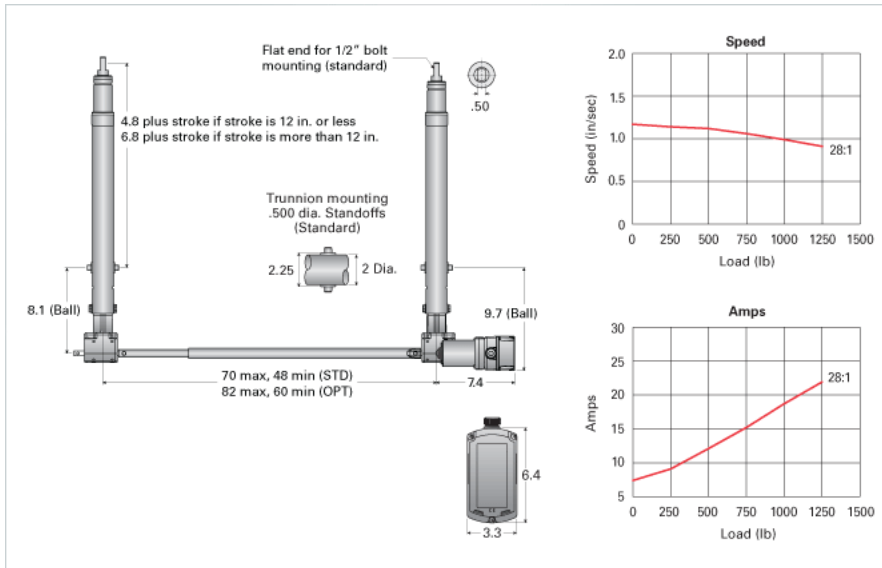

### Product Info

Screw Type

Ball Screw

### Details

Screw Size

0631-0200 SRT RA

Voltage

12 VDC Hi Speed

Gear Ratio

28:1

Load Capacity [lb]

1250

Speed [in/sec]

0.9

Amps

23

Maximum Cylinder Width [in]

70

Minimum Cylinder Width [in]

48

### Performance Specifications

Duty Cycle [% of 5 Minutes]

25

Protection Class

IP54

Maximum Temperature Range [F°]

160

Minimum Temperature Range [F°]

-30