


## PowerAC 3/4"-10 TA w/Bronze Nut

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 3/4"-10 TA w/Bronze Nut today!

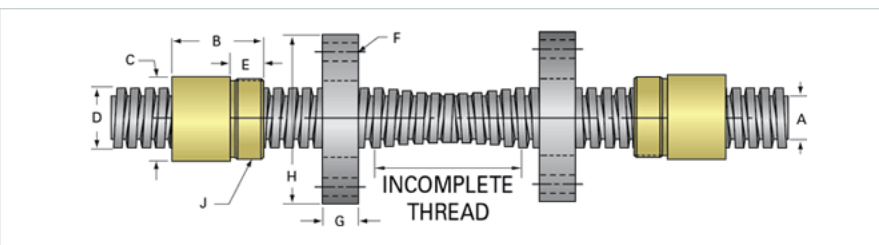

<b>Rolled Inch Twin-Lead Acme Screw</b>	
<b>(Twin-Lead Screw)Product Info</b>	
Screw Code	070 TA
Screw Direction	RH/LH
Screw Material	4140 Series
<b>(Twin-Lead Screw)Details</b>	
Lead [in]	0.100
Starts	1
Pitch [in]	0.100
Turns Per Inch	10
Threads per Inch	6
Thread Code	070
Form	2C
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	15
End Code for Type 4 [* Journals may show tracings of the thread]	8
<b>(Twin-Lead Screw)Dimensions</b>	
A - Root Diameter Minimum [in]	0.608
D - Nominal Rod Diameter [in]	0.750
Incomplete Overlapping Thread Length [in]	2.00
Maximum Overall Length [in]	72
Maximum Useable LH & RH Thread [in]	35.00
<b>(Twin-Lead Screw)Weight</b>	
Weight Per Foot [lb]	1.65
<b>(Twin-Lead Screw)Part Numbers</b>	
36" Part Number	TL3/4-10RS 36
72" Part Number	TL3/4-10RS 72
144" Part Number	
<b>(Twin-Lead Screw)Performance Specifications</b>	
Lead Accuracy +/- [in/in]	0.0003
<b>Inch Acme Nut with Optional Flange</b>	
<b>(Nut)Product Info</b>	
Part Number	80070
Thread Direction	LH
Type	Bronze
<b>(Nut)Details</b>	
Lead [in]	0.100
Starts	1
Pitch [in]	0.100
Turns Per Inch	10
Lash (Maximum Axial) [in]	0.007
Nominal Rod Diameter [in]	0.750
Threads per Inch	10
Thread Code	070
Form	2C
<b>(Nut)Dimensions</b>	
B [in]	1.25
C [in]	1.13
E [in]	0.50
F (n) Dia. [in]	(4) .266
F BCD [in]	2.090
G [in]	0.53
H [in]	2.63
J [in]	1.000-18
<b>(Nut)Forces and Torques</b>	
Torque to Raise 1 lb. [in-lb]	0.064
<b>(Nut)Flange Part Numbers</b>	
Flange No-Lash Part Number	73262
Flange Part Number	70262
<b>(Nut)Weight</b>	
Flange Weight [lb]	0.78
Nut Weight [lb]	0.22

<b>(Nut)Performance Specifications</b>	
Efficiency [%]	25
Lead Accuracy +/- [in/in]	0.0003
Dynamic Load Capacity [lb]	2812
Static Load Capacity [lb]	9000
<b>(Nut on Other Side)Product Info</b>	
Part Number	20070
Thread Direction	RH
Type	Bronze
<b>(Nut on Other Side)Details</b>	
Lead [in]	0.100
Starts	1
Pitch [in]	0.100
Turns Per Inch	10
Lash (Maximum Axial) [in]	0.007
Nominal Rod Diameter [in]	0.750
Threads per Inch	10
Thread Code	070
Form	2C
<b>(Nut on Other Side)Dimensions</b>	
B [in]	1.25
C [in]	1.13
E [in]	0.50
F (n) Dia. [in]	(4) .266
F BCD [in]	2.090
G [in]	0.53
H [in]	2.63
J [in]	1.000-18
<b>(Nut on Other Side)Forces and Torques</b>	
Torque to Raise 1 lb. [in-lb]	0.064
<b>(Nut on Other Side)Flange Part Numbers</b>	
Flange No-Lash Part Number	73262
Flange Part Number	70262
<b>(Nut on Other Side)Weight</b>	
Flange Weight [lb]	0.78
Nut Weight [lb]	0.22
<b>(Nut on Other Side)Performance Specifications</b>	
Efficiency [%]	25
Lead Accuracy +/- [in/in]	0.0003
Dynamic Load Capacity [lb]	2812
Static Load Capacity [lb]	9000